

TURBO 2 ULTRAFast HIGH VOLTAGE RECTIFIER

Table 1: Main Product Characteristics

$I_{F(AV)}$	Up to 2 x 10 A
V_{RRM}	600 V
T_j	175°C
V_F (typ)	1.05 V
t_{rr} (max)	35 ns

FEATURES AND BENEFITS


- Ultrafast switching
- Low reverse recovery current
- Low thermal resistance
- Reduces switching & conduction losses

DESCRIPTION

The STTH16L06, which is using ST Turbo 2 600V technology, is specially suited for use in switching power supplies, and industrial applications, as rectification and discontinuous mode PFC boost diode.

Table 2: Order Codes

Part Number	Marking
STTH16L06CT	STTH16L06CT
STTH16L06CFP	STTH16L06CFP

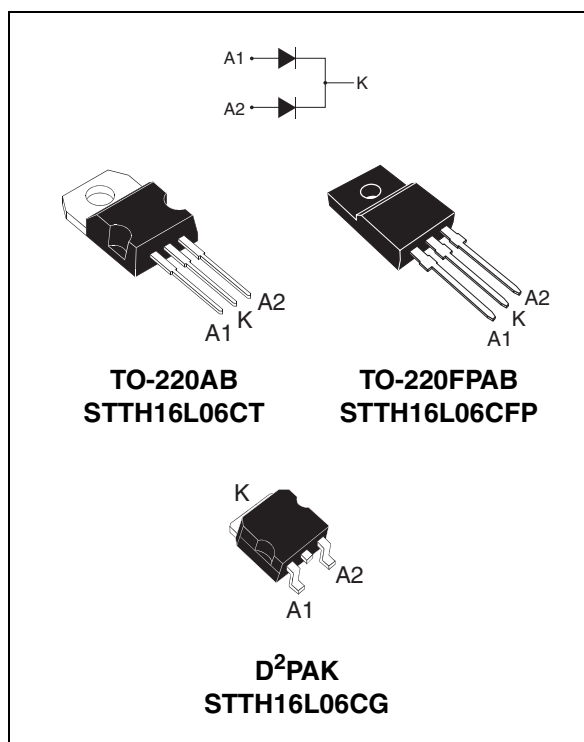

Part Number	Marking
STTH16L06CG	STTH16L06CG
STTH16L06GG-TR	STTH16L06CG

Table 3: Absolute Ratings (limiting values, per diode)

Symbol	Parameter				Value	Unit
V _{RRM}	Repetitive peak reverse voltage				600	V
I _{F(RMS)}	RMS forward voltage				30	A
I _{F(AV)}	Average forward current δ = 0.5	TO-220AB / D ² PAK	T _c = 140°C	Per diode	8	A
			T _c = 135°C	Per device	16	
			T _c = 130°C	Per diode	10	
			T _c = 120°C	Per device	20	
		TO-220FPAB	T _c = 110°C	Per diode	8	
			T _c = 80°C	Per device	16	
I _{FSM}	Surge non repetitive forward current		tp = 10ms sinusoidal		90	A
T _{stg}	Storage temperature range				-65 to + 175	°C
T _j	Maximum operating junction temperature				175	°C

STTH16L06C**Table 4: Thermal Resistance**

Symbol	Parameter			Value (max).	Unit
$R_{th(j-c)}$	Junction to case	TO-220AB / D ² PAK	Per diode	2.5	°C/W
		TO-220FPAB	Per diode	5	
		TO-220AB / D ² PAK	Total	1.6	
		TO-220FPAB	Total	3.8	
$R_{th(c)}$	Coupling	TO-220AB / D ² PAK		0.7	°C/W
		TO-220FPAB		2.5	

When the diodes 1 and 2 are used simultaneously:

$$\Delta T_j(\text{diode } 1) = P(\text{diode } 1) \times R_{th(j-c)}(\text{Per diode}) + P(\text{diode } 2) \times R_{th(c)}$$

Table 5: Static Electrical Characteristics

Symbol	Parameter	Test conditions		Min.	Typ	Max.	Unit
I_R *	Reverse leakage current	$T_j = 25^\circ\text{C}$	$V_R = V_{RRM}$			8	μA
		$T_j = 150^\circ\text{C}$			25	240	
V_F **	Forward voltage drop	$T_j = 25^\circ\text{C}$	$I_F = 8\text{A}$			1.8	V
		$T_j = 150^\circ\text{C}$			1.05	1.35	
		$T_j = 25^\circ\text{C}$	$I_F = 16\text{A}$			2.08	
		$T_j = 150^\circ\text{C}$			1.28	1.64	

Pulse test: * $t_p = 5\text{ ms}$, $\delta < 2\%$

** $t_p = 380\text{ }\mu\text{s}$, $\delta < 2\%$

To evaluate the conduction losses use the following equation: $P = 1.06 \times I_{F(AV)} + 0.036 I_F^2(\text{RMS})$

Table 6: Dynamic Characteristics (per diode)

Symbol	Parameter	Test conditions		Min.	Typ	Max.	Unit
t_{rr}	Reverse recovery time	$T_j = 25^\circ\text{C}$	$I_F = 0.5\text{A}$ $I_{rr} = 0.25\text{A}$ $I_R = 1\text{A}$			35	ns
			$I_F = 1\text{A}$ $dl_F/dt = 50\text{ A}/\mu\text{s}$ $V_R = 30\text{V}$		40	55	
I_{RM}	Reverse recovery current	$T_j = 125^\circ\text{C}$	$I_F = 8\text{A}$ $V_R = 400\text{V}$ $dl_F/dt = 100\text{ A}/\mu\text{s}$		4.5	6.5	A
t_{fr}	Forward recovery time	$T_j = 25^\circ\text{C}$	$I_F = 8\text{A}$ $dl_F/dt = 100\text{ A}/\mu\text{s}$ $V_{FR} = 1.1 \times V_{Fmax}$			200	ns
V_{FP}	Forward recovery voltage	$T_j = 25^\circ\text{C}$	$I_F = 8\text{A}$ $dl_F/dt = 100\text{ A}/\mu\text{s}$ $V_{FR} = 1.1 \times V_{Fmax}$		3.5		V

Figure 1: Conduction losses versus average forward current (per diode)

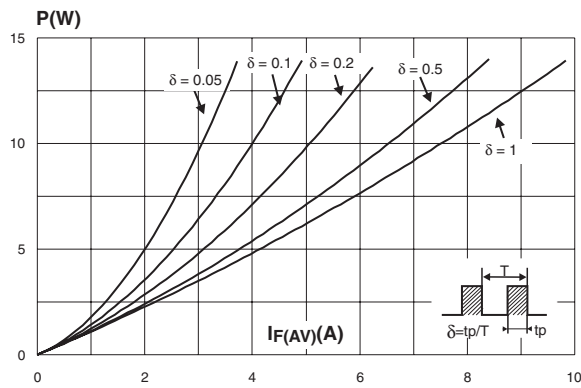


Figure 3: Relative variation of thermal impedance junction to case versus pulse duration (TO-220AB & D²PAK)

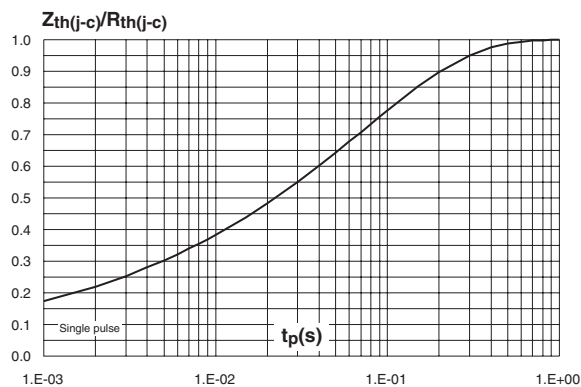


Figure 5: Peak reverse recovery current versus di_F/dt (typical values, per diode)

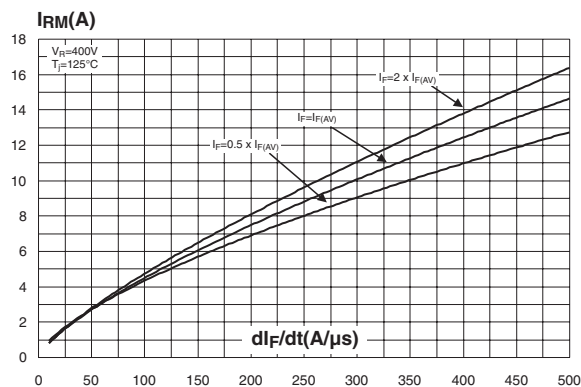


Figure 2: Forward voltage drop versus forward current (per diode)

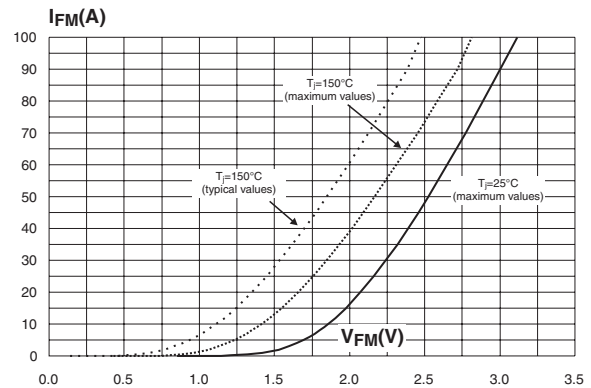


Figure 4: Relative variation of thermal impedance junction to case versus pulse duration (TO-220FPAB)

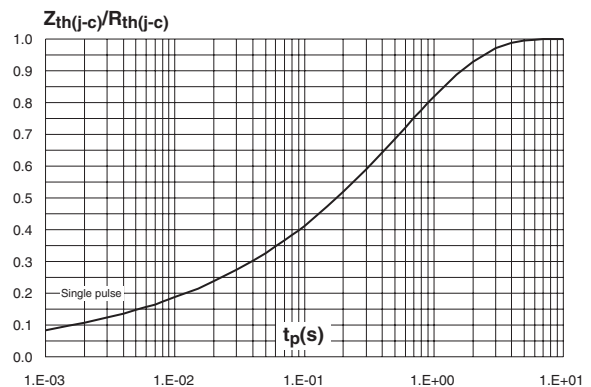


Figure 6: Reverse recovery time versus di_F/dt (typical values, per diode)

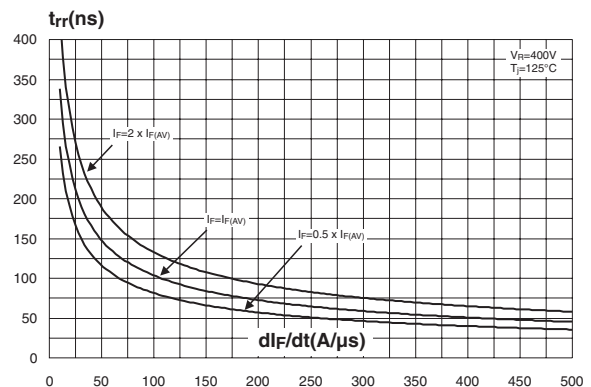


Figure 17: TO-220FPAB Package Mechanical Data

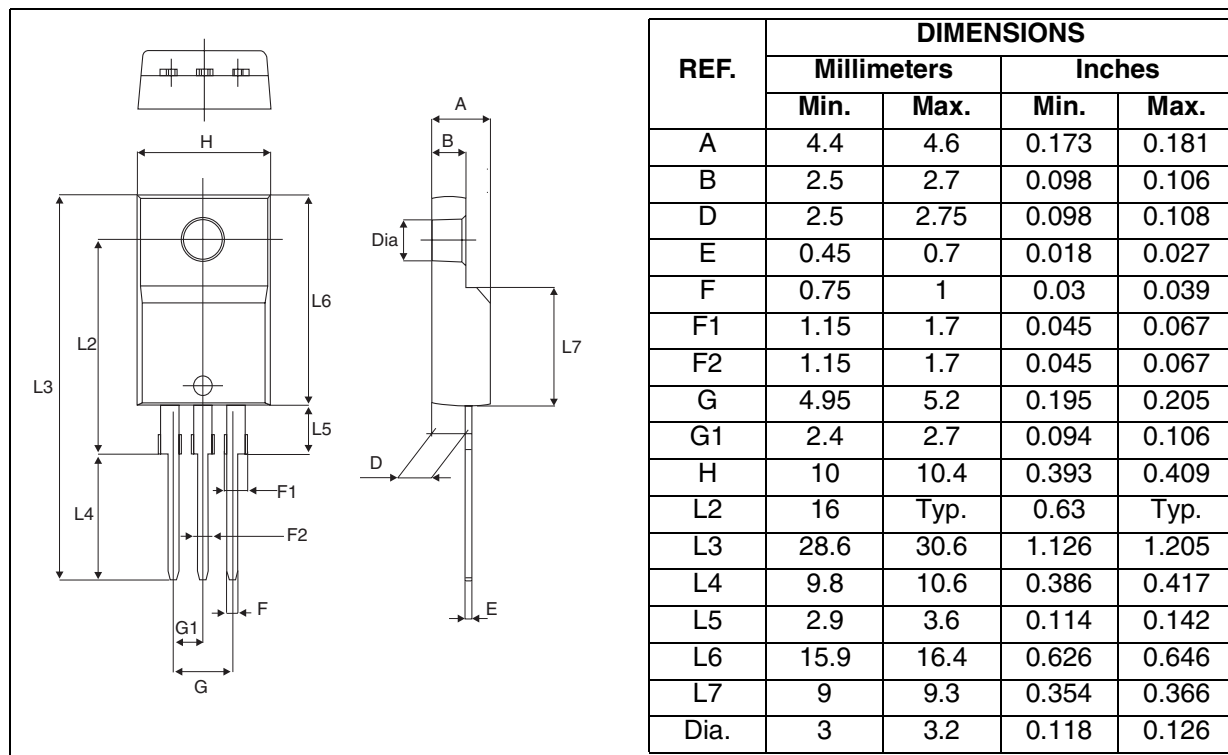


Table 7: Ordering Information

Ordering type	Marking	Package	Weight	Base qty	Delivery mode
STTH16L06CT	STTH16L06CT	TO-220AB	2.23 g	50	Tube
STTH16L06CG	STTH16L06CG	D ² PAK	1.48 g	50	Tube
STTH16L06CG-TR	STTH16L06CG	D ² PAK	1.48 g	1000	Tape & eel
STTH16L06CFP	STTH16L06CFP	TO-220FPAB	1.70 g	50	Tube

- Epoxy meets UL94, V0
- Cooling method: by conduction (C)
- Recommended torque value: 0.8 m.N. (TO-220FPAB) / 0.55 m.N. (TO-220AB)
- Maximum torque value: 1.0 m.N. (TO-220FPAB) / 0.70 m.N. (TO-220AB)