


# MMBT3904

## NPN EPITAXIAL SILICON TRANSISTOR

### GENERAL PURPOSE APPLICATION

#### FEATURES


- \* Collector-Emitter Voltage:  $V_{CEO}=40V$
- \* Complementary to MMBT3906

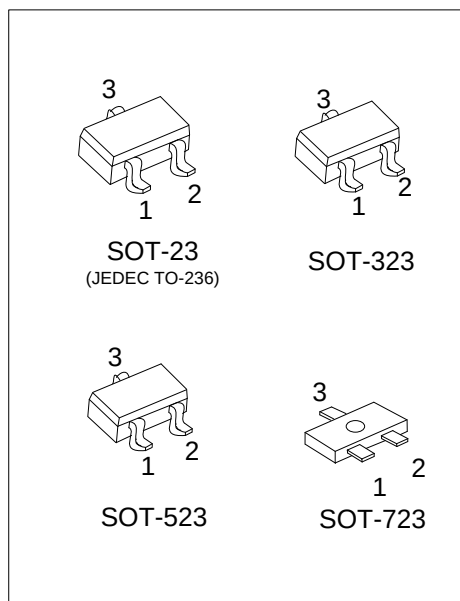


#### ORDERING INFORMATION

| Ordering Number |                 | Package | Pin Assignment |   |   | Packing   |
|-----------------|-----------------|---------|----------------|---|---|-----------|
| Lead Free       | Halogen Free    |         | 1              | 2 | 3 |           |
| MMBT3904L-AE3-R | MMBT3904G-AE3-R | SOT-23  | B              | E | C | Tape Reel |
| MMBT3904L-AL3-R | MMBT3904G-AL3-R | SOT-323 | B              | E | C | Tape Reel |
| MMBT3904L-AN3-R | MMBT3904G-AN3-R | SOT-523 | B              | E | C | Tape Reel |
| MMBT3904L-AQ3-R | MMBT3904G-AQ3-R | SOT-723 | B              | E | C | Tape Reel |

Note: Pin Assignment: B: Base E: Emitter C: Collector

|                                                                                                                                                                            |                                                                                                                                              |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| <p>MMBT3904G-AE3-R</p>  <p>(1)Packing Type<br/>(2)Package Type<br/>(3)Green Package</p> | <p>(1) R: Tape Reel<br/>(2) AE3: SOT-23, AL3: SOT-323, AN3: SOT-523<br/>AQ3: SOT-723<br/>(3) G: Halogen Free and Lead Free, L: Lead Free</p> |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|

#### MARKING



■ **ABSOLUTE MAXIMUM RATING** ( $T_A=25^{\circ}\text{C}$ , unless otherwise specified)

| PARAMETER                 |         | SYMBOL    | RATINGS    | UNIT               |
|---------------------------|---------|-----------|------------|--------------------|
| Collector-Base Voltage    |         | $V_{CBO}$ | 60         | V                  |
| Collector-Emitter Voltage |         | $V_{CEO}$ | 40         | V                  |
| Emitter-Base Voltage      |         | $V_{EBO}$ | 6          | V                  |
| Collector Current         |         | $I_C$     | 200        | mA                 |
| Collector Dissipation     | SOT-23  | $P_C$     | 0.35       | W                  |
|                           | SOT-323 |           | 0.3        | W                  |
|                           | SOT-523 |           | 0.27       | W                  |
|                           | SOT-723 |           | 0.13       | W                  |
| Junction Temperature      |         | $T_J$     | +150       | $^{\circ}\text{C}$ |
| Storage Temperature       |         | $T_{STG}$ | -55 ~ +150 | $^{\circ}\text{C}$ |

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ **THERMAL CHARACTERISTICS**

| PARAMETER           |         | SYMBOL        | RATINGS | UNIT                 |
|---------------------|---------|---------------|---------|----------------------|
| Junction to Ambient | SOT-23  | $\theta_{JA}$ | 360     | $^{\circ}\text{C/W}$ |
|                     | SOT-323 |               | 420     | $^{\circ}\text{C/W}$ |
|                     | SOT-523 |               | 450     | $^{\circ}\text{C/W}$ |
|                     | SOT-723 |               | 470     | $^{\circ}\text{C/W}$ |





Note: The data tested by surface mounted on a 1 inch<sup>2</sup> FR-4 board with 2OZ copper.

■ **ELECTRICAL CHARACTERISTICS** ( $T_A=25^{\circ}\text{C}$ , unless otherwise specified)

| PARAMETER                                   | SYMBOL         | TEST CONDITIONS                                                                     | MIN  | TYP | MAX  | UNIT |
|---------------------------------------------|----------------|-------------------------------------------------------------------------------------|------|-----|------|------|
| Collector-Base Breakdown Voltage            | $V_{CBO}$      | $I_C=10\mu\text{A}$ , $I_E=0$                                                       | 60   |     |      | V    |
| Collector-Emitter Breakdown Voltage         | $V_{CEO}$      | $I_C=1\text{mA}$ , $I_B=0$ (Note)                                                   | 40   |     |      | V    |
| Emitter-Base Breakdown Voltage              | $V_{EBO}$      | $I_E=10\mu\text{A}$ , $I_C=0$                                                       | 6    |     |      | V    |
| Collector-Emitter Saturation Voltage (Note) | $V_{CE(SAT)1}$ | $I_C=10\text{mA}$ , $I_B=1\text{mA}$                                                |      |     | 0.2  | V    |
|                                             | $V_{CE(SAT)2}$ | $I_C=50\text{mA}$ , $I_B=5\text{mA}$                                                |      |     | 0.3  | V    |
| Base-Emitter Saturation Voltage (Note)      | $V_{BE(SAT)1}$ | $I_C=10\text{mA}$ , $I_B=1\text{mA}$                                                | 0.65 |     | 0.85 | V    |
|                                             | $V_{BE(SAT)2}$ | $I_C=50\text{mA}$ , $I_B=5\text{mA}$                                                |      |     | 0.95 | V    |
| Collector Cut-Off Current                   | $I_{CEX}$      | $V_{CE}=30\text{V}$ , $V_{EB}=3\text{V}$                                            |      |     | 50   | nA   |
| Base Cut-Off Current                        | $I_{BL}$       | $V_{CE}=30\text{V}$ , $V_{EB}=3\text{V}$                                            |      |     | 50   | nA   |
| DC Current Gain (Note)                      | $h_{FE1}$      | $V_{CE}=1\text{V}$ , $I_C=0.1\text{mA}$                                             | 40   |     |      |      |
|                                             | $h_{FE2}$      | $V_{CE}=1\text{V}$ , $I_C=1\text{mA}$                                               | 70   |     |      |      |
|                                             | $h_{FE3}$      | $V_{CE}=1\text{V}$ , $I_C=10\text{mA}$                                              | 100  |     | 300  |      |
|                                             | $h_{FE4}$      | $V_{CE}=1\text{V}$ , $I_C=50\text{mA}$                                              | 60   |     |      |      |
|                                             | $h_{FE5}$      | $V_{CE}=1\text{V}$ , $I_C=100\text{mA}$                                             | 30   |     |      |      |
| Current Gain Bandwidth Product              | $f_T$          | $V_{CE}=20\text{V}$ , $I_C=10\text{mA}$ , $f=100\text{MHz}$                         | 300  |     |      | MHz  |
| Output Capacitance                          | $C_{OB}$       | $V_{CB}=5\text{V}$ , $I_E=0$ , $f=1\text{MHz}$                                      |      |     | 4    | pF   |
| Turn On Time                                | $t_{ON}$       | $V_{CC}=3\text{V}$ , $V_{BE}=0.5\text{V}$ , $I_C=10\text{mA}$ , $I_{B1}=1\text{mA}$ |      |     | 70   | ns   |
| Turn Off Time                               | $t_{OFF}$      | $I_{B1}=1\text{mA}$ , $I_{B2}=1\text{mA}$                                           |      |     | 250  | ns   |

Note: Pulse test:  $P_W \leq 300\mu\text{s}$ , Duty Cycle  $\leq 2\%$ .

### ■ TYPICAL CHARACTERISTICS

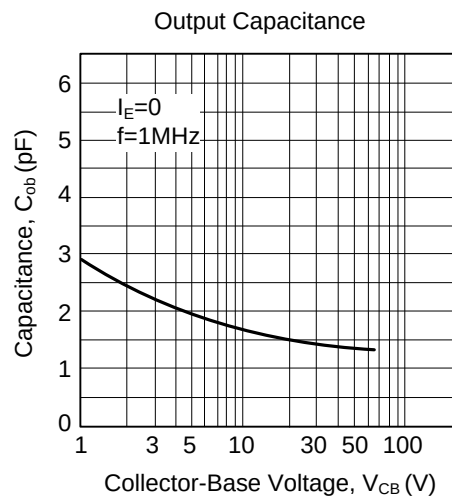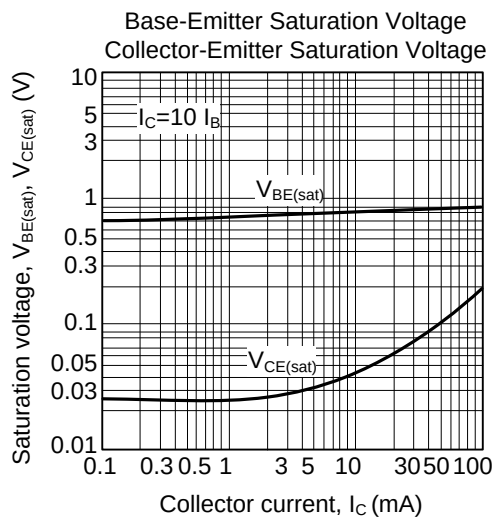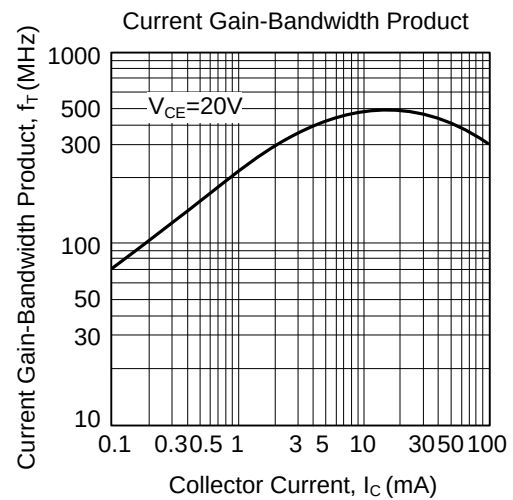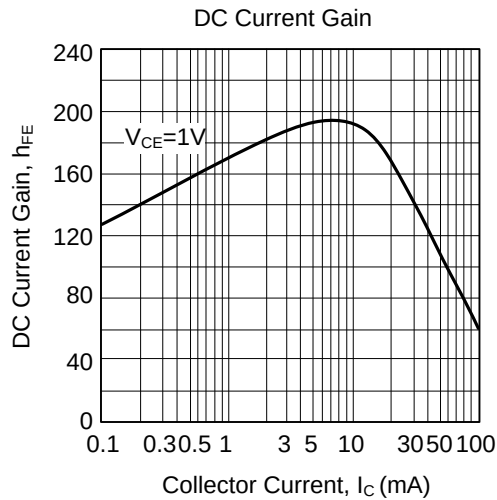

Yixin assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all Yixin products described or contained herein. Yixin products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. Yixin reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.